



## Top features

- Luminous part is integrated and fastened to fixture body by snap-locks.
- End-caps adopt integrated bending technique.
- Field-adjustable light output and CCT.
- 0-10V dimming.
- Bi-level motion sensor or battery backup available.
- Operating temp range -20°C/-4°F to 50°C /122°F.

## Benefits You Need

Faster surface mounting or row mounting.


The luminous part can be easily removed when install EM or sensor.

Forget the thermal expansion and contraction of the lens.

## Make you more impressive

Lens & End-Cap customization is available.

Translucent end-caps and sensor bracket for better visual feeling.

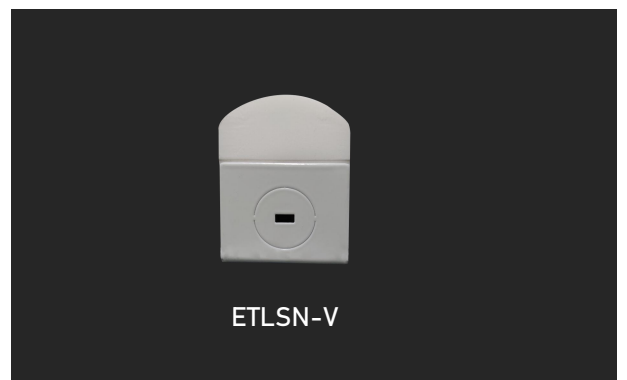

# Specifications

**UL Listing:**  
Suitable for damp locations

**LEDs:**  
Long-life, high-efficacy, micro-power LEDs

**Lifespan:**  
Lumen Maintenance, L70 > 100,000 hours

**Dimming Driver:**  
Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.

**Housing:**  
Sheet metal stamping

**Finish:**  
Long lasting white with high durability

**IESNA LM-79 & IESNA LM-80 Testing:**  
Ever-tie LED luminaires have been tested based on IESNA LM-79 and LM-80 by a third-party laboratory

**Mounting:**  
Surface mounting by screws(not included) is ready, a pair of cover plate of junction box is included.

**Optional accessories(purchased separately):**

- Surface mounting kit
- Cable suspending mounting kit
- V-hooks & Chain suspending mounting kit
- Row connector
- Right angle connection kit
- Wire guards, square profile or arc profile optional




## Dimensions and Weights

Length

PF-Narrow

Height and width

Product Weight(Kg/lb)

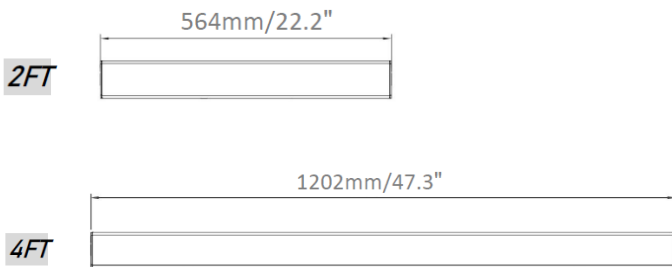

Product series	2FT	4FT
	1.10/2.43	2.00/4.41

## Performance

	LED PACKAGE	DELIVERED LUMENS	WATTAGE	UL Number	DLC Product ID
2'	PF-Narrow-2FT/20/YDM/830	2560	20	E524483 UL-1598	S-R57OJ4
	PF-Narrow-4FT/40/YDM/830	5000	40	E524483 UL-1598	S-84N93Z
4'	PF-Narrow-4FT/40/YDM/835/S	5280	40	E524483 UL-1598	S-86WNJQ
	PF-Narrow-4FT/40/YDM/835/S/EM	5280	40	E524483 UL-1598	S-86WNJQ
	PF-Narrow-4FT/40/YDM/835	5200	40	E524483 UL-1598	S-86WNJQ

## Ordering Information

### ORDERING EXAMPLE:

PF-NARROW-4FT/FE/40/YDM/830

Product Series	Length	Module type	Power	Dimming	CCT QQQ	Other Items/Options
PF-Narrow	2FT 4FT	FE	20 40	YDM	830 835	Battery Backup Motion sensor Optional input voltage Driver code LED code
					80 CRI, 5000K (Cool)	120-347

