

LOW PROFILE LED SURFACE MOUNT DISK LIGHT




The disc surface mount LED downlight in 4 inch and 6 inch is a low profiled installation solution designed to fit the tightest of spaces. The driverless DOB driver onboard technology allows this fixture to fasten to most 3 inch or 4 inch round, octagon or square junction boxes or shallow pan box, eliminating the need for recessed housing. Simply remove the twist lock diffuser and set your included captive screws.

Specifications	PF-LP4-LED-10W-30K	PF-LP6-LED-15W-30K	PF-LP6-LED-15W
	Details		
Nominal Wattage	10W	15W	15W
Lumens Delivered (LM) @3000K	700	1050	1050
Equivalency	60W INC	100W INC	100W INC
Efficiency (LM/W)	63		
Beam Angle	100		
CRI	>80, Optional >90		
Color Temp. (K)	3000K		
L70 Lifetime (Hrs)	>50,000		
Voltage	120 VAC		
Dimming	TRIAC/ELV 10%-100%		
Power Factor	>0.9		
Housing	Matte White, Black, Silver and Oil Rubbed Bronze		
Lens	PC		
Mounting	Surface Mount Ceiling Onto 3" or 4" Junction Boxes		
Operating Temp.	-4°F to 104°F		
Certificates	cETLus, Energy Star		
Environment	Indoor & Outdoor, Wet Locations		
Warranty	5 Years Limited		

Compatibility


Installs into standard J-box applications:

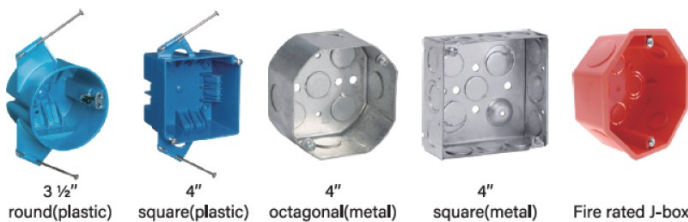

Product Dimensions

PF-LP6-LED-15W

PF-LP6-LED-10W

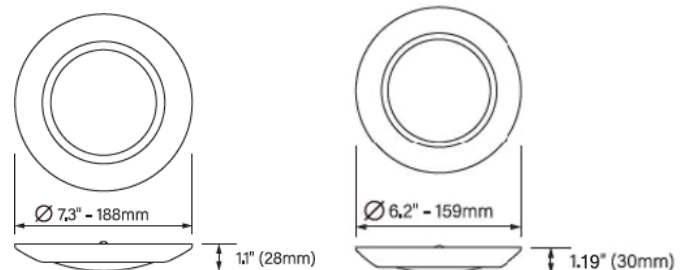

Contact Details

